

AlGaAs/GaAs Infrared Chip ---TK0714IRA

1. Scope

- The specification applies to AlGaAs infrared chips.
- Type : TK0714IRA.

2. Structure

- AlGaAs/GaAs infrared chip.
- P/N mesa type.
- Electrode P (anode) side : Aluminum or Gold.
- Electrode N (cathode) side : Gold alloy.

3. Size

- Chip size : $350\mu\text{m} \times 350\mu\text{m}$
- Chip height : $220\mu\text{m} \pm 30\mu\text{m}$
- Pattern drawing : per fig. 1

4. Electro-Optical Characteristics


($T_a = +25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 300\text{mA}$		1.65	1.75	V
Reverse Voltage	V_R	$I_R = 10\mu\text{A}$	5			V
Radiant Power	P_O	$I_F = 20\text{mA}$	1.5			mw
Peak Wavelength	λ_P	$I_F = 20\text{mA}$		940		nm
Spectrum Width of Half Value	$\Delta\lambda$	$I_F = 20\text{mA}$		50		nm

* High current 300mA Vf test is by 3msec pulse condition, no guarantee for life quality after test.

5. Application

- Remote control, Receiver module.
- Home appliance : TV Set, Air condition, Audio equipment, Camera, Toys etc.

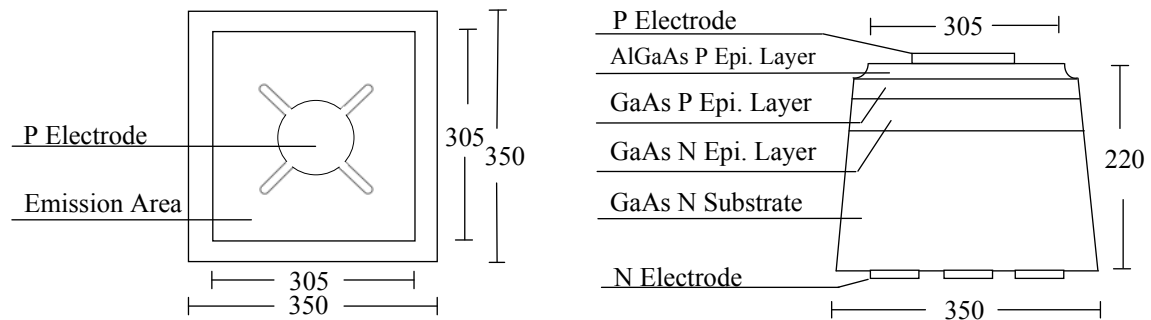

Unit : μm






fig. 1

2015.Mar



AlGaAs/GaAs Infrared Chip ---TK0714IRA

Electro-Optical Characteristics Curve

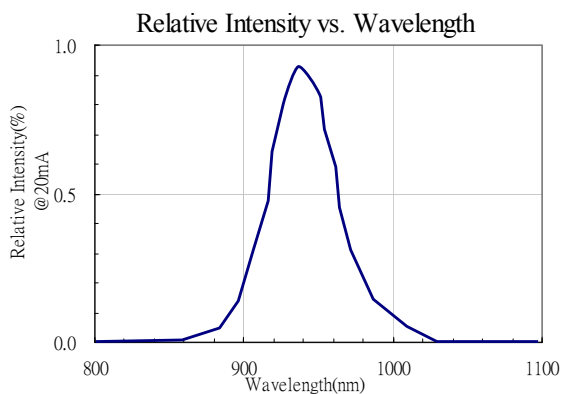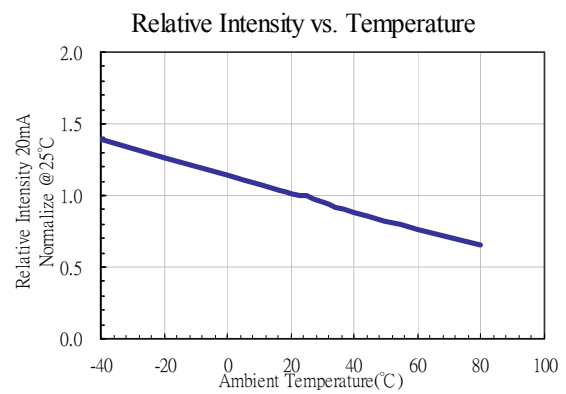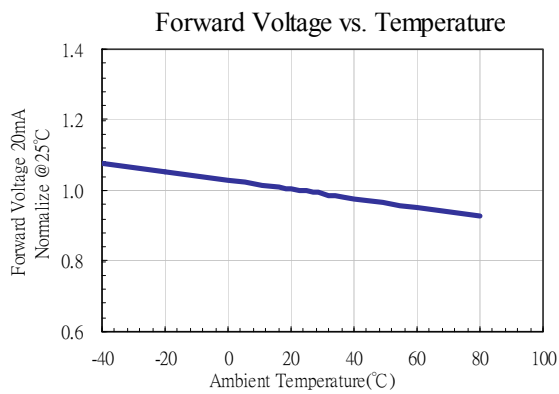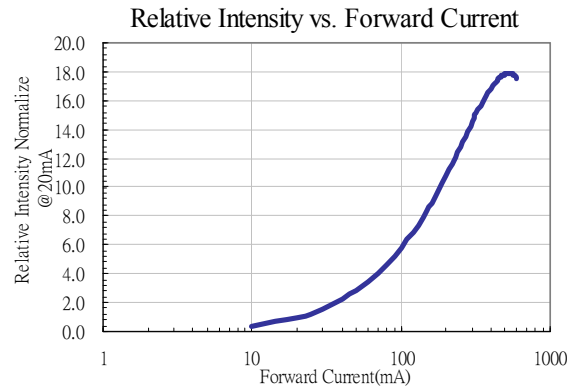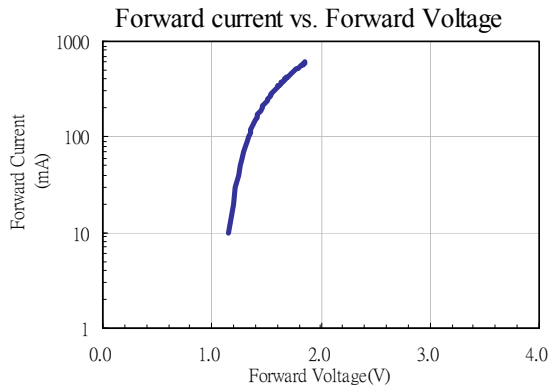

TYNTEK Head Office
 TYNTEK Chunan Branch
<http://www.tyntek.com.tw>

Tel : 886-3-5781616
Tel : 886-37-582997

Fax : 886-3-5780545
Fax : 886-37-582908

E-mail : service@serv.tyntek.com.tw