

GaP/GaP Yellow Green Chip ---TK0811YGU

1. Scope

- The specification applies to GaP LED chips.
- Type : TK0811YGU.

2. Structure

- GaP/GaP yellow green LED chip.
- P/N mesa type.
- Side wall roughing.
- Electrode P (anode) side : Aluminum or Gold.
- Electrode N (cathode) side : Gold alloy.

3. Size

- Chip size : $275\mu\text{m} \times 275\mu\text{m}$
- Chip height : $260\mu\text{m} \pm 30\mu\text{m}$
- Pattern drawing : per fig. 1


4. Electro-Optical Characteristics

($T_a = +25^\circ\text{C}$)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20\text{mA}$		2.25	2.40	V
Reverse Current	I_R	$V_R = 5\text{V}$			10	μA
Luminous Intensity	I_V	$I_F = 20\text{mA}$	6.0	※		mcd
Wavelength	λ_p / λ_d	$I_F = 20\text{mA}$		568/572		nm
Spectrum Width of Half Value	$\Delta\lambda$	$I_F = 20\text{mA}$		30		nm

- ※
- Rank C : $8.5 \leq \text{avg.} < 10.0$ mcd
 - Rank D : $10.0 \leq \text{avg.} < 11.5$ mcd
 - Rank E : $11.5 \leq \text{avg.} < 13.0$ mcd
 - Rank F : $13.0 \leq \text{avg.} < 15.0$ mcd

- Rank G : $15.0 \leq \text{avg.} < 18.0$ mcd
- Rank H : $\text{avg.} \geq 18.0$ mcd

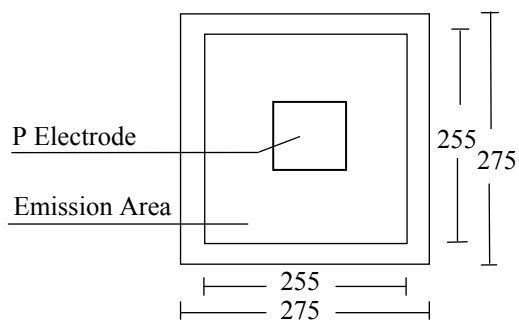

Unit : μm

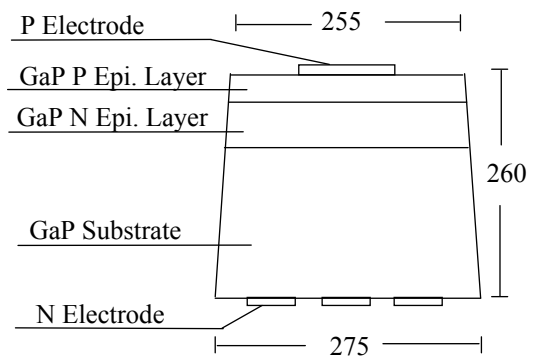


fig. 1

2012.May



☐ TYNTEK Head Office
☐ TYNTEK Chunan Branch
[http : //www.tyntek.com.tw](http://www.tyntek.com.tw)






Tel : 886-3-5781616
Tel : 886-37-582997

Fax : 886-3-5780545
Fax : 886-37-582908

E-mail : service@serv.tyntek.com.tw

GaP/GaP Yellow Green Chip ---TK0811YGU

Electro-Optical Characteristics Curve

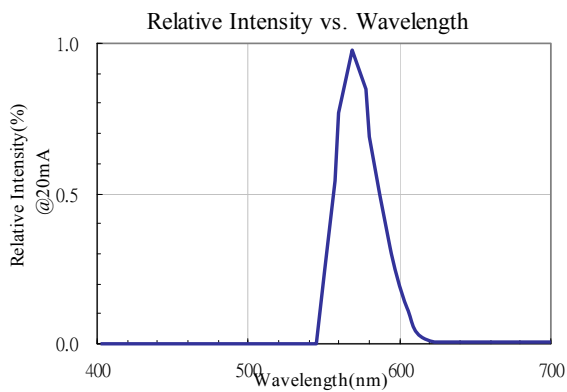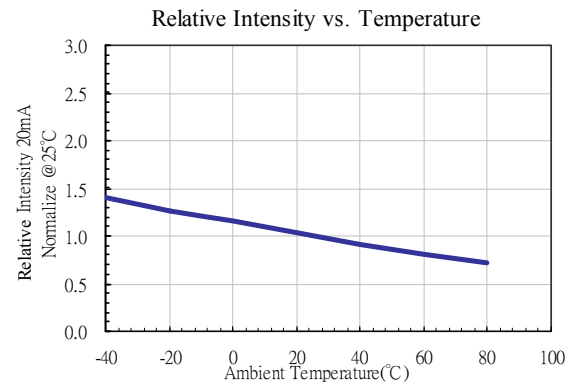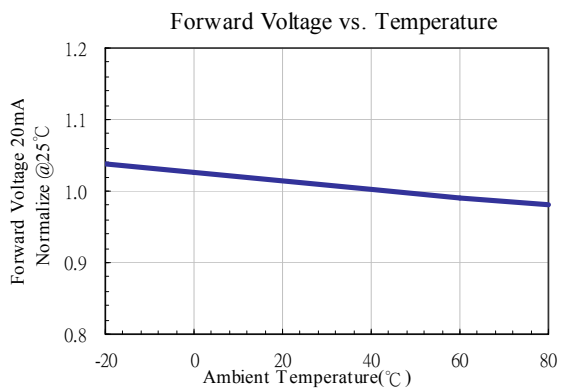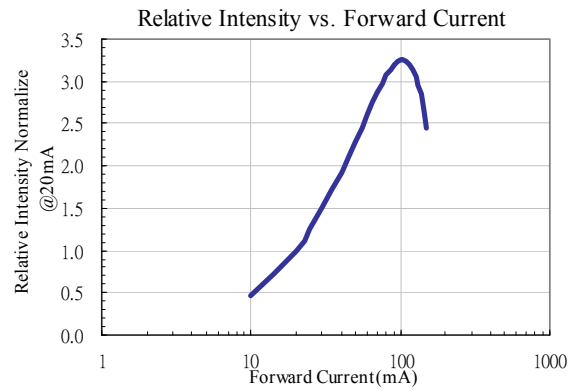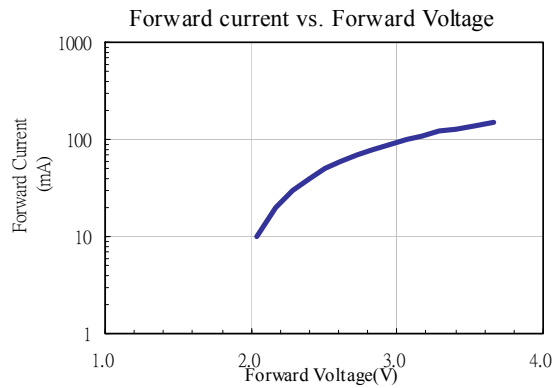

☐ TYNTEK Head Office
☐ TYNTEK Chunan Branch
[http : //www.tyntek.com.tw](http://www.tyntek.com.tw)

Tel : 886-3-5781616

Tel : 886-37-582997

E-mail : service@serv.tyntek.com.tw

Fax : 886-3-5780545

Fax : 886-37-582908