

AlGaAs / GaAs VCSEL Chip ---TK1413VPN

1. Scope

- The specification applies to AlGaAs infrared chips
- Type : TK1413VPN

2. Structure

- AlGaAs with AlGaAs / GaAs DBR structure—VCSEL Chip.
- P Electrode (anode) : Gold.
- N Electrode (cathode) : Gold.


3. Size

- Chip size : $330 \times 300 \mu\text{m} \pm 25 \mu\text{m}$
- Thickness : $150 \pm 25 \mu\text{m}$
- Bonding Pad : $100 \mu\text{m}$
- Pattern drawing : per fig. 1

4. Electro-Optical Characteristics

($T_a = +25^\circ\text{C}$)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 100\text{mA}$		2.0	2.5	V
Threshold Current	I_{th}	$T = 25^\circ\text{C}$		30	35	mA
Output Power	P_o	$I_F = 100\text{mA}$		100		mW
Center Wavelength	λ_c	$I_F = 100\text{mA}$	840	850	860	nm
Beam Divergence	Θ	$I_F = 100\text{mA}$		30		Degree
ESD		HBM		2000		V

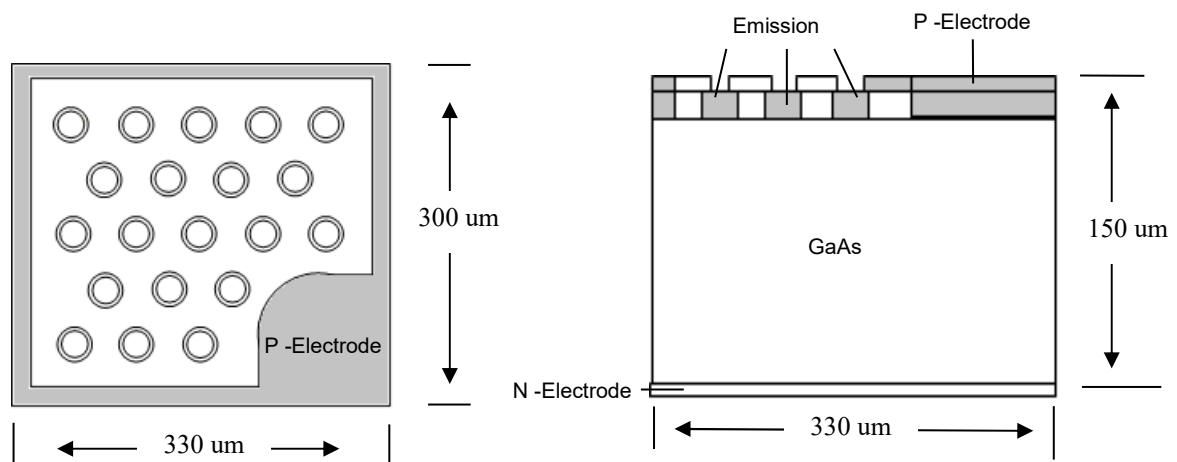

AlGaAs / GaAs VCSEL Chip ---TK1413VPN


Electro-Optical Characteristics Curve

Forward Voltage vs Forward Current(mA)

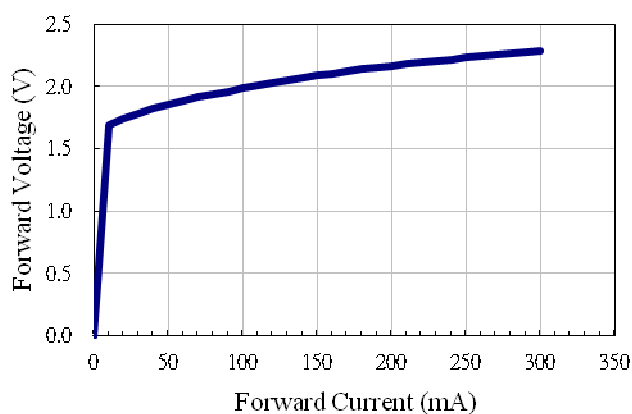


Relative Intensity vs. Forward Current


Normalize @100mA

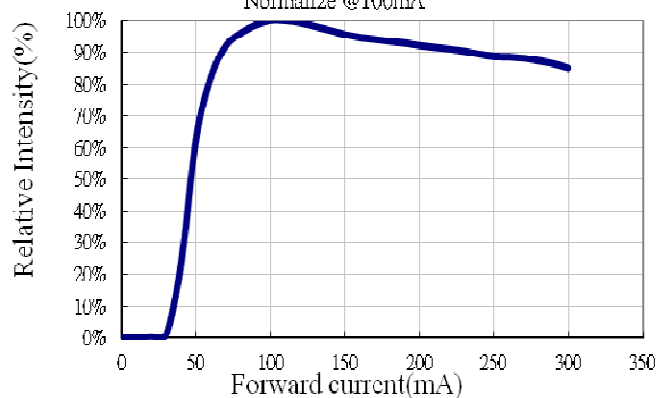


Relative Intensity vs. Wavelength

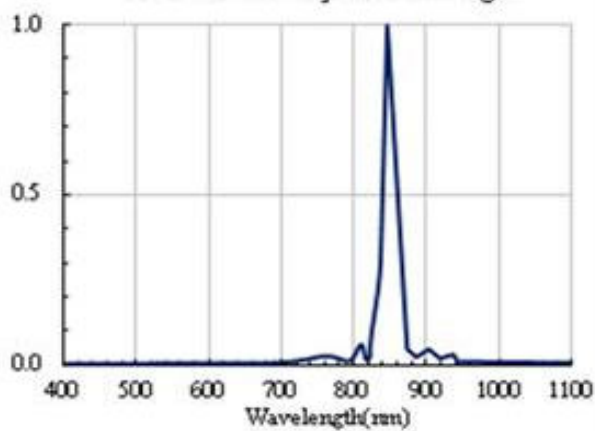

Half power angle on TO-can, 25°C, 100mA

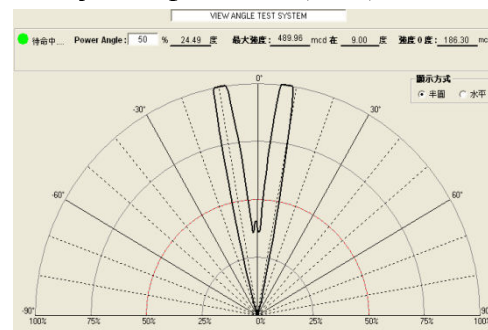

Emitting Pattern on TO-can, 25°C, 100mA

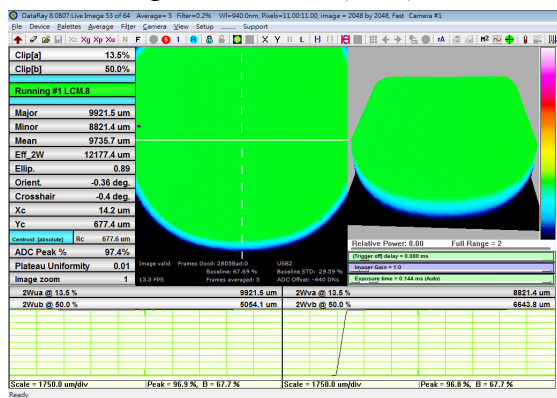

- TYNTEK Head Office
 - TYNTEK Chunan Branch
- http : //www.tyntek.com.tw

Tel : 886-3-5781616

Tel : 886-37-582997

E-mail : service@serv.tyntek.com.tw

Fax : 886-3-5780545

Fax : 886-37-582908